

CHOSEN WOOD WINDOW MAINTENANCE COMPUTER SIMULATION REPORT

SCOPE OF WORK

SLIP Window Panel on Baseline Window B - AERC 100 simulations to determine EPc and EPh ratings.

REPORT NUMBER

M3751.01-301-45 R0

TEST DATE

06/09/21

ISSUE DATE

06/17/21


PAGES

11

DOCUMENT CONTROL NUMBER

RT-R-AMER-Test-7853 (11/23/20)

©2020 INTERTEK

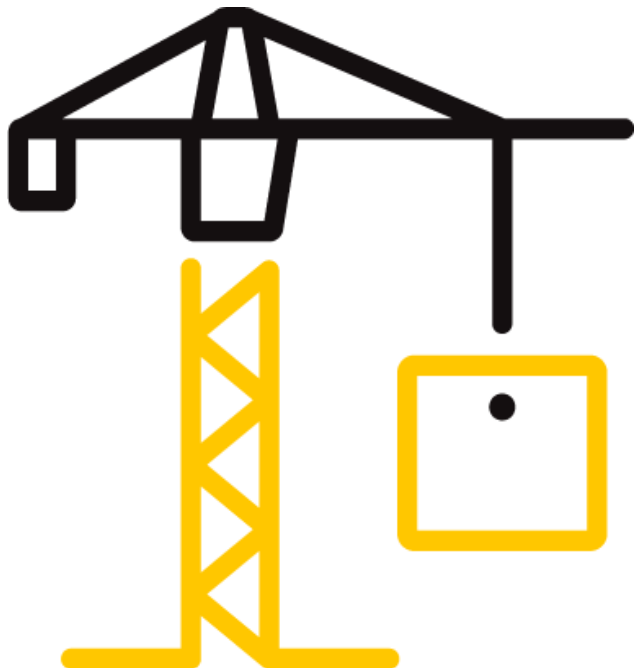

TEST REPORT FOR CHOSEN WOOD WINDOW MAINTENANCE

Report No.: M3751.01-301-45 R0

Date: 06/17/21

REPORT ISSUED TO

CHOSEN WOOD WINDOW MAINTENANCE

18574 Pacific Hwy E

Oregon City, Oregon 97045

SECTION 1

SUMMARY

SERIES/MODEL: SLIP Window Panel


Intertek Building & Construction (Intertek B&C) was contracted to perform AERC computer simulations utilizing thermal modeling computer software developed by Lawrence Berkeley National Laboratory (LBNL). Results obtained are simulated values and were secured using the designated test methods.


Unless differently required, Intertek reports apply the "Simple Acceptance" rule also called "Shared Risk approach," of ILAC-G8:09/2019, Guidelines on Decision Rules and Statements of Conformity.

Intertek B&C is an AERC accepted calculation entity and all simulations were conducted in full compliance with AERC approved procedures and specifications.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory.

For INTERTEK B&C:

COMPLETED BY: Kenny C. White
TITLE: Laboratory Manager, SIRC
SIGNATURE: 
DATE: 06/17/21

REVIEWED BY: Eric S. Leitner
TITLE: Manager – Thermal Testing & Simulations, SIRC
SIGNATURE: 
DATE: 06/17/21

KCW:kcw

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT FOR CHOSEN WOOD WINDOW MAINTENANCE

Report No.: M3751.01-301-45 R0

Date: 06/17/21

SECTION 2

TEST METHODS

The products were evaluated in accordance with the following:

AERC 100, Standard for Rating the Energy Performance of Fenestration Attachments

SECTION 3

TEST PROCEDURE

The total product, including specific frame, spacer, and glass details, was modeled using AERC approved software.

FRAME AND EDGE MODELING	Therm 7.8.8
CENTER-OF-GLASS MODELING	Window 7.8.14
TOTAL PRODUCT CALCULATIONS	Window 7.8.14
GLASS DATA LIBRARY	IGDB 80.0
ATTACHMENT DATA LIBRARY	CGDB 20.0
TOTAL EP_c EP_h CALCULATIONS	AERCalc 1.3.7

Modeling Assumptions / Technical Interpretations

Any modeling assumptions and technical interpretations required to model this product are listed below.

- 1) Air leakage was determined per AERC 1.2. Reference Report #J8952.01-109-44.

TEST REPORT FOR CHOSEN WOOD WINDOW MAINTENANCE

Report No.: M3751.01-301-45 R0

Date: 06/17/21

**SECTION 4
SUMMARY**

SIMULATION SPECIMEN DESCRIPTION

SERIES/MODEL	SLIP Window Panel
PRODUCT TYPE	Fixed, 4-Sided
ATTACHMENT TYPE	Window Panel
DESCRIPTION	Aluminum Window Panel
BASE WINDOW	BW-B

BASE WINDOW GLAZING DESCRIPTION					
	<i>OUTER PANE</i>	<i>MIDDLE PANE</i>	<i>INNER PANE</i>	<i>GAP SIZE</i>	<i>OVERALL</i>
All	1/8"	N/A	1/8"	0.50"	3/4"
	<i>OUTER PANE</i>		<i>MIDDLE PANE</i>		<i>INNER PANE</i>
All	Clear		N/A		Clear
	<i>SPACER TYPE</i>		<i>PRIMARY SEAL</i>	<i>SECONDARY SEAL</i>	<i>CODE</i>
All	Aluminum Spacer		Butyl	Butyl	A1-D

ATTACHMENT DESCRIPTION						
	<i>TYPE</i>		<i>CODE</i>	<i>POSITION</i>	<i>MOUNT</i>	<i>GAP</i>
	Window Panel		WP	Exterior	Inside	0.84"
	<i>OUTER PANE</i>	<i>MIDDLE PANE</i>	<i>INNER PANE</i>	<i>GAP SIZE</i>	<i>OVERALL</i>	
1,2	1/8"	N/A	N/A	N/A	1/8"	
	<i>OUTER PANE</i>		<i>MIDDLE PANE</i>		<i>INNER PANE</i>	
1	Clear		N/A		N/A	
2	Energy Advantage (0.164, #2)		N/A		N/A	

	<i>TYPE</i>		<i>CODE</i>	<i>POSITION</i>	<i>MOUNT</i>	<i>GAP</i>
	Window Panel		WP	Exterior	Inside	0.82"
	<i>OUTER PANE</i>	<i>MIDDLE PANE</i>	<i>INNER PANE</i>	<i>GAP SIZE</i>	<i>OVERALL</i>	
3,4,5	1/4"	N/A	N/A	N/A	1/4"	
	<i>OUTER PANE</i>		<i>MIDDLE PANE</i>		<i>INNER PANE</i>	
3	Clear		N/A		N/A	
4	Energy Advantage (0.164, #2)		N/A		N/A	
5	Clear Lami		N/A		N/A	

	<i>SPACER TYPE</i>	<i>PRIMARY SEAL</i>	<i>SECONDARY SEAL</i>	<i>CODE</i>
All	No Spacer	N/A	N/A	N/A

* Stated per client/manufacturere
N/A Non-Applicable

TEST REPORT FOR CHOSEN WOOD WINDOW MAINTENANCE

Report No.: M3751.01-301-45 R0

Date: 06/17/21

SECTION 5

SIMULATION RESULTS

TOTAL PRODUCT CALCULATIONS (SLIP Window Panel)								
Option Number	Description	AERC Baseline Window Type	Total Product Performance					
			U-Value (BTU/h·ft ² ·F)	SHGC	VT	AL (cfm/ft ²)	EP _c	EP _h
1	SLIP 3mm Clear	BW-B	0.31	0.56	0.61	1.58	12	50
2	SLIP 3mm EA	BW-B	0.26	0.52	0.57	1.58	18	66
3	SLIP 6mm Clear	BW-B	0.31	0.53	0.60	1.58	18	45
4	SLIP 6mm EA	BW-B	0.26	0.47	0.55	1.58	26	60
5	SLIP 6mm Lami	BW-B	0.31	0.53	0.60	1.58	19	45

TEST REPORT FOR CHOSEN WOOD WINDOW MAINTENANCE

Report No.: M3751.01-301-45 R0

Date: 06/17/21

SECTION 6

DRAWINGS / BILL OF MATERIALS


The drawings which follow have been reviewed by Intertek B&C and are representative of the simulation result(s) reported herein. Any deviations are documented herein or on the drawings.

Part Description	Material	Finish
Frame	Aluminum Extrusion	Paint/Powdercoat
Gasket	Cork Neoprene	
Fasteners	Optional SS FLAT HD PHIL TAP SCREW #6 X 3/4"	Mill

 Total Quality Assured.	Report #: <u>M3751.01-301-45</u>
	Date: <u>06/17/2021</u>
	Verified by: <u><i>[Signature]</i></u>

NOTE:

- 1. INSTALL GLAZING TAPE IN A MANNER THAT PREVENTS GAPS AT CORNERS AND WHERE VERTICAL & HORIZONTAL TAPE APPLICATION MEET.**
- 2. GLAZING TAPE MUST BE CONCEALED BEHIND SLIM LINE INSULATING PANE (SLIP) FRAME UPON INSTALLATION, TYP.**

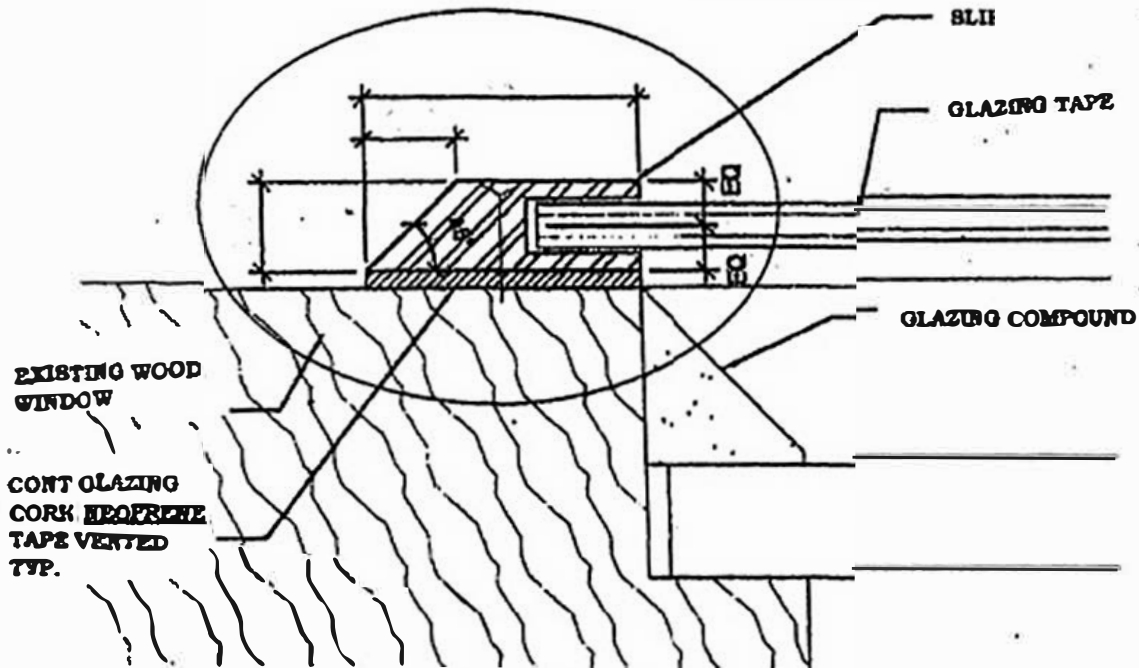


SLIP (SLIM LINE INSULATING PANE) DETAIL

SCALE: NTS

intertek Total Quality. Assured.	Report #:	M3751.01-301-45
	Date:	06/17/2021
	Verified by:	<i>PC. [Signature]</i>

REVISIONS				MIC	COMP	24102	REV.
REV.	DESCRIPTION	DATE	APPROVED	CAL	OTHR		

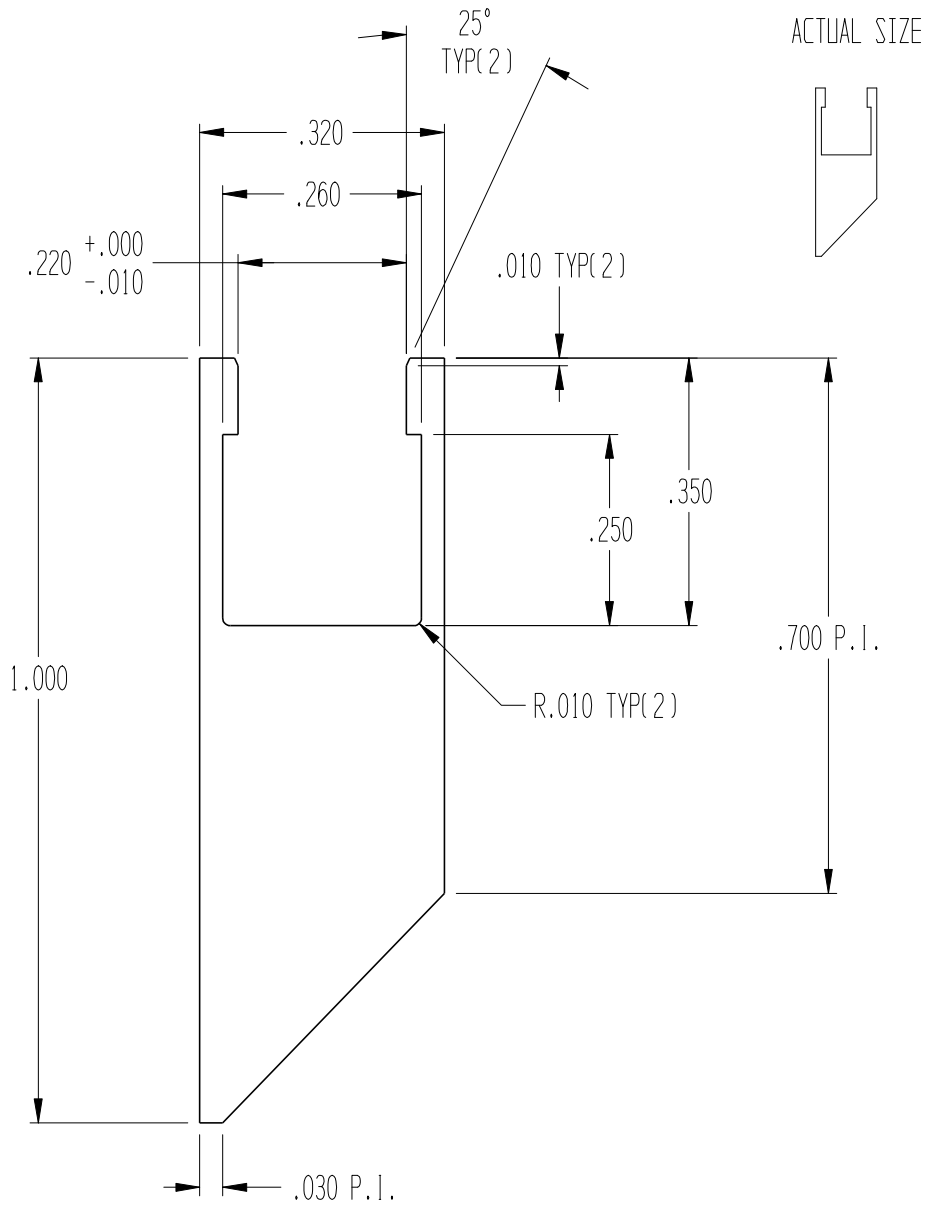

intertek
Total Quality Assured.

Report #: M3751.01-301-45
 Date: 06/17/2021
 Verified by: *R. L. ...*

APPROVED BY
DATE


NOTES :

1. ALL TOLERANCES PER ALUM ASSOC STD.

EST. AREA	0.1895	CYL. SIZE	4.25	 P.O. BOX 247 * CODDINGTON ROAD WHITEHOUSE STATION, N J 08889		DIE NUMBER 24102	
EST. WGT.	0.2274	EXT. RATIO	94				
PERIMETER	3.2314	NO. HOLES	1				
FACTOR	14	ALLOY	6063-T5				
SOLID	<input checked="" type="checkbox"/>	HOLLOW	<input type="checkbox"/>	SEMI-HOLLOW	<input type="checkbox"/>	CUSTOMER	CHOSEN
SCALE	4X	DATE	4/21/21	DWN.	JJR	DESCRIPTION	NEW 1/4"
							REV.

	REVISIONS			MIC	COMP	24104	
REV.	DESCRIPTION	DATE	APPROVED	CAL	DTHR	DIE NUMBER	REV.

ACTUAL SIZE

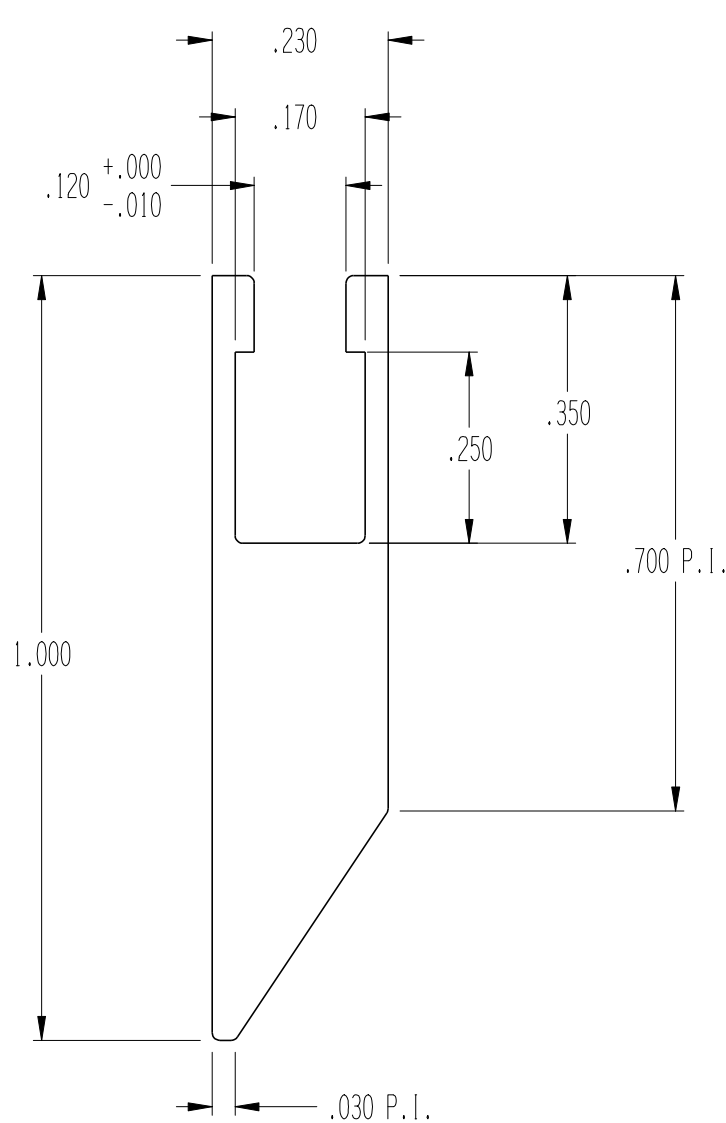

intertek Report #: M3751.01-301-45
 Total Quality Assured. Date: 06/17/2021
 Verified by: *R. L. ...*

NOTES :

1. ALL UNSPECIFIED TOLERANCES PER ALUM ASSOC STD.
2. UNSPECIFIED RADII .010

APPROVED BY
DATE

EST. AREA	0.1455	CYL. SIZE	4.0	 P.O. BOX 247 * CODDINGTON ROAD WHITEHOUSE STATION, N J 08889		DIE NUMBER 24104	
EST. WGT.	0.1746	EXT. RATIO	109				
PERIMETER	3.0980	NO. HOLES	1				
FACTOR	18	ALLOY	6063-T5				
SOLID	<input checked="" type="checkbox"/>	HOLLOW	<input type="checkbox"/>	SEMI-HOLLOW	<input type="checkbox"/>	CUSTOMER	CHOSEN
SCALE	4X	DATE	4/29/21	DWN.	JJR	DESCRIPTION	E201-WEB
						REV.	

TEST REPORT FOR CHOSEN WOOD WINDOW MAINTENANCE

Report No.: M3751.01-301-45 R0

Date: 06/17/21

SECTION 7

REVISION LOG

REVISION #	DATE	PAGES	REVISION
.01R0	06/17/21	N/A	Original Report Issued to Chosen Wood Window Maintenance.